

## Counting scale

Easy and fast operation piece counting scale



PCS



CHECK



BAT INT



AC/DC



IP44




NO VERIF

### FEATURES:

- Piece counting scale.
- High resolution, 60.000 internal divisions.
- Aluminium load cell.
- ABS housing.
- Stainless steel pan.
- Pan size: 300x230 mm.
- IP44 protection.
- Individual displays for the total weight (6 digits), unit weight (6 digits) and number of pieces (6 digits).
- Backlight LCD displays with digits of 20 mm.
- 8 function indication symbols.
- 20 keys.
- Overload protection.
- Bubble level.
- Adjustable feet in height.
- Operating temperature range: 0°C +40°C.
- Internal recharged battery.
- Power supply with adaptor AC/DC 230Vac 50Hz.
- Units: kg.
- Optional RS232. Print and PC format.

### FUNCTIONS

- Accumulation
- Totalization
- Zero, Tare, Net
- Piece counting
- Limits function

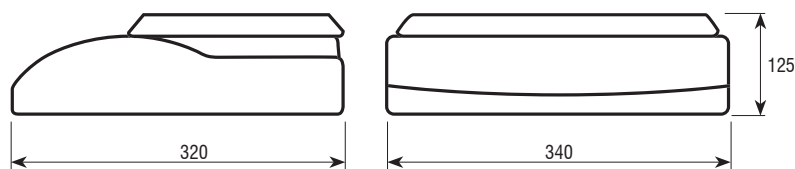

Dimensions (mm)

| Code # | Capacity (kg) | Readout (g) | Pan dimensions (mm) | Packing dimensions (mm) | Packing weight (kg) | Certifications |  |
|--------|---------------|-------------|---------------------|-------------------------|---------------------|----------------|--|
|        |               |             |                     |                         |                     | ENAC           |  |
|        |               |             |                     |                         |                     | Code #         |  |
| 260130 | 3             | 0,05        | 300x230             | 445x375x225             | 5,3                 | 900033         |  |
| 260132 | 6             | 0,1         | 300x230             | 445x375x225             | 5,3                 | 900001         |  |
| 260129 | 15            | 0,2         | 300x230             | 445x375x225             | 5,3                 | 900001         |  |
| 260131 | 30            | 0,5         | 300x230             | 445x375x225             | 5,3                 | 900001         |  |

### Accessories

| Code # | Accessories description |
|--------|-------------------------|
| BCP232 | RS232 output            |