

# ETHERNET IP

"ETHERNETIP1S": interface for conversion RS485 - Ethernet IP for DIN bar



Interface for din bar with super solid "slim" type box, for conversion from serial RS485 to Ethernet IP. For DGT1 / DGT1S series transmitters.

**The best solution  
for advanced industrial  
applications**

## ETHERNET IP HUB FOR UP TO 16 WEIGHING SCALES

- The HUB configuration allows you to read the data from all the network scales simultaneously via the ETHERNET IP protocol. In detail:
  - NET weight and GROSS weight
  - Weight status (e.g. positive, negative, stable, unstable)
  - Error conditions (e.g. overload, underload)
  - DIGITAL INPUT status
  - RELAY OUTPUT status

## ETHERNET IP CONVERTER FOR INDIVIDUAL WEIGHING SCALES

- If the converter is used to communicate with a single scale, the ETHERNET IP protocol allows the following data to be read:
  - NET, GROSS and TARE weight
  - Weight status (e.g. positive, negative, stable, unstable)
  - Error conditions (e.g. overload, underload)
  - DIGITAL INPUT status
  - RELAY OUTPUT status
  - Output SETPOINT writing
  - Alibi Memory
  - Calibration
  - SETUP configuration

## ETHERNET IP FOR WEIGHING SCALES: TECHNICAL FEATURES

- Ethernet IP port.
- ABS case for mounting on DIN rail.
- Designed to operate with a DGT1S weight transmitter. Quick configuration from the transmitter programming menu.
- RS485 serial port (9600 to 115200 baud) with a "quick connect" system for rapid connection.
- Power supply: 12-24Vdc.

DETAIL 1




DETAIL 2



DETAIL 3



DETAIL 4

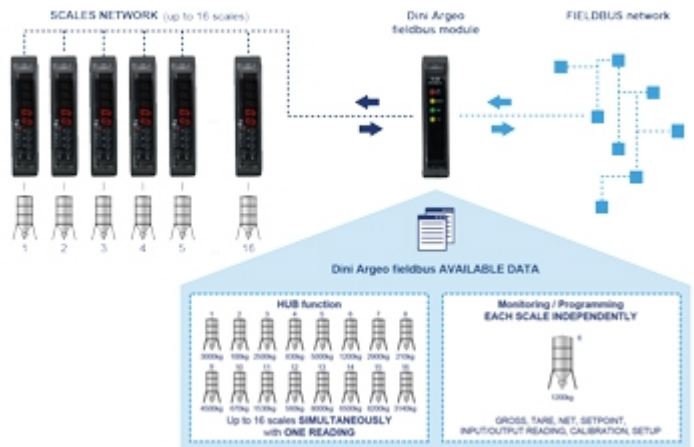

**COVENTRY SCALE COMPANY**



COVENTRY SCALE COMPANY LTD

BARKERS BUTTS LANE 137 - CV61EB - COVENTRY - UNITED KINGDOM

Tel. 0044-2476-593500

Fax. 044-2476-601239

E-mail [info@coventryscale.co.uk](mailto:info@coventryscale.co.uk)

Web [www.coventryscale.co.uk](http://www.coventryscale.co.uk)